

■ **General Description**

The SS40 is an integrated Hall effect latched sensor designed for electronic commutation of brush-less DC motor applications. The device includes an on-chip Hall voltage generator for magnetic sensing, a comparator that amplifiers the Hall voltage, and a Schmitt trigger to provide switching hysteresis for noise rejection, and open-collector output. An internal bandgap regulator is used to provide temperature compensated supply voltage for internal circuits and allows a wide operating supply range.


A north pole of sufficient strength will turn the output ON. In the absence of a magnetic field, the output is OFF.

■ **Features**

- Wide operating voltage range: 3.8V~30V
- Maximum output sink current 25mA
- Open-Collector pre-driver
- Reverse polarity protection
- Package: SIP3


■ **Pin Configuration**

(Top View)

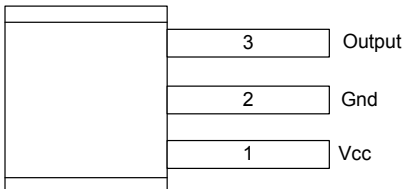

Name	No.	Status	Description
Vcc	1	P	IC Power Supply
Gnd	2	P	IC Ground
Output	3	O	It is low state during the N magnetic field

■ **Block Diagram**

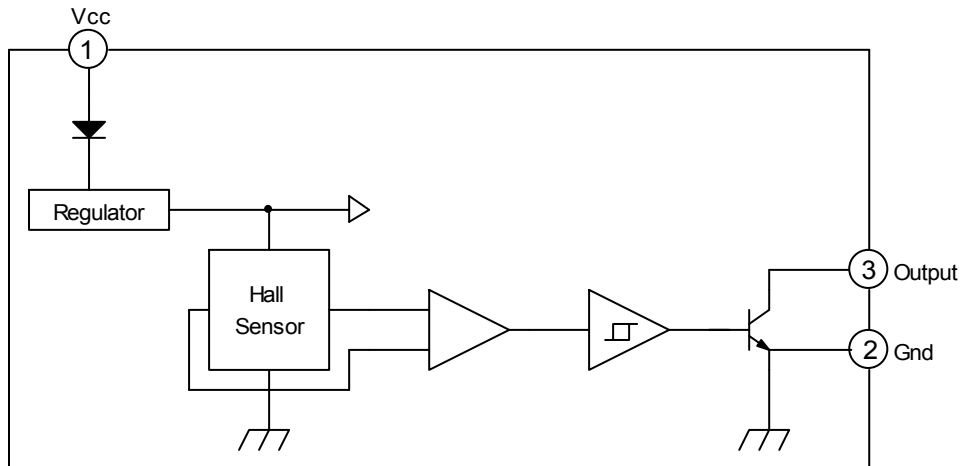

**■ Absolute Maximum Ratings**

Vcc Pin Voltage		30V
Output OFF Voltage, Vce		30V
Output ON Current(Io) (Continuous Current)		25mA
Power Dissipation	Ta=25°C	400mW
	Ta=100°C	178mW
Thermal Resistance	T <sub>ja</sub>	0.34°C/mW
	T <sub>jc</sub>	0.42°C/mW
Operating Temperature Range		-40°C ~+125°C
Storage Temperature Range		-65°C ~+150°C
Junction Temperature		+160°C
Lead Temperature(Soldering, 10 sec)		+260°C



**■ DC Electrical Characteristics(at Ta=25°C)**

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Operating Voltage	Vcc	No use pin is open(Fig1)	3.8	-	30.0	V
Supply current	Icc	No use pin is open Vcc:3.0V~24V(Fig1)	-	3.5	10	mA
Output Saturation Voltage	V <sub>SAT</sub>	Vcc=12V,Io=20mA(Fig1)	-	165	200	mV
Output Rise time	(t <sub>r</sub> )	RL=500Ω CL=20pF(Fig1)	0.2	-	0.75	μS
Output Fall time	(t <sub>f</sub> )	RL=500Ω CL=20pF(Fig1)	20	-	150	nS

Note: Fig1 The IC output state is under N magnetic field.

**■ Magnetic Characteristics**

SS40-A	Ta=-40°C ~+125°C				
Parameter	Symbol	Min.	Typ.	Max.	Unit
Operate point	Bop	+5	-	+80	G
Release Point	Brp	-80	-	-5	G
Hysteresis	Bhys	30		120	G

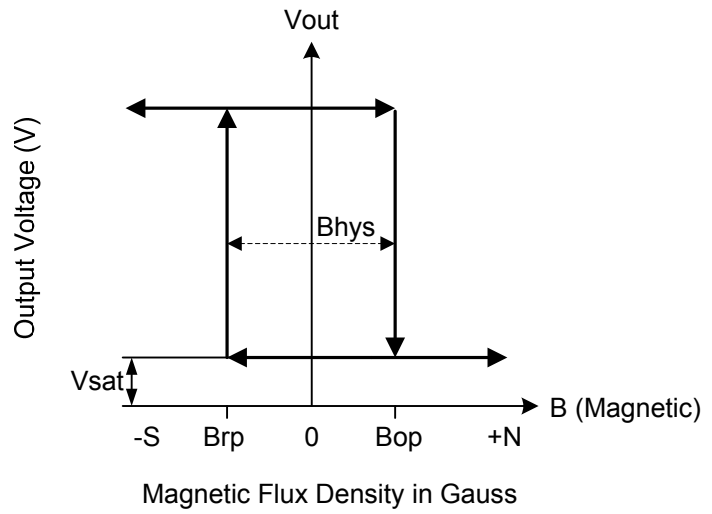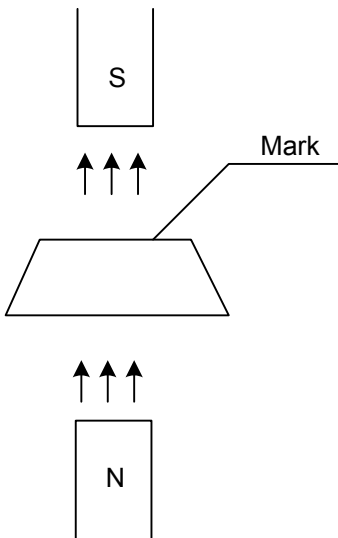

■ Test Circuits

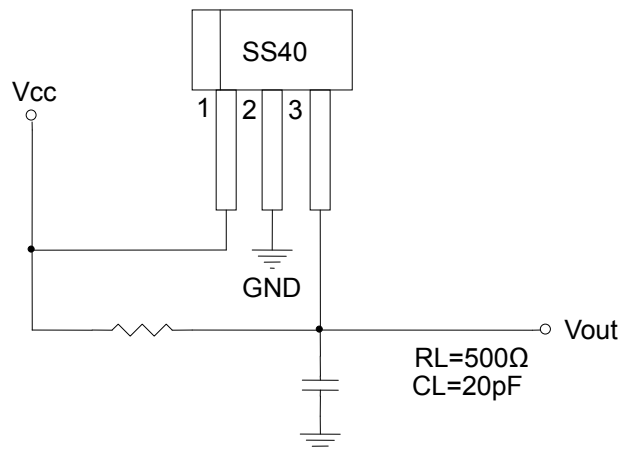
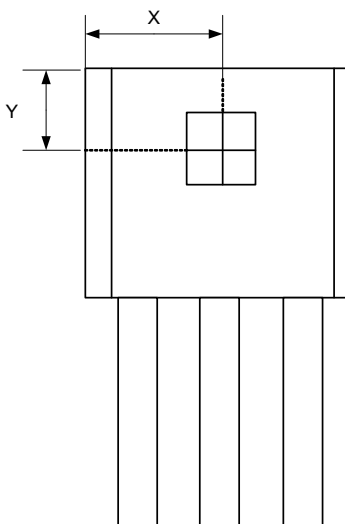


Figure 1. Test Circuit

■ Hall Sensor Location

The Fig2 is hall sensor location, where marks the IC number.




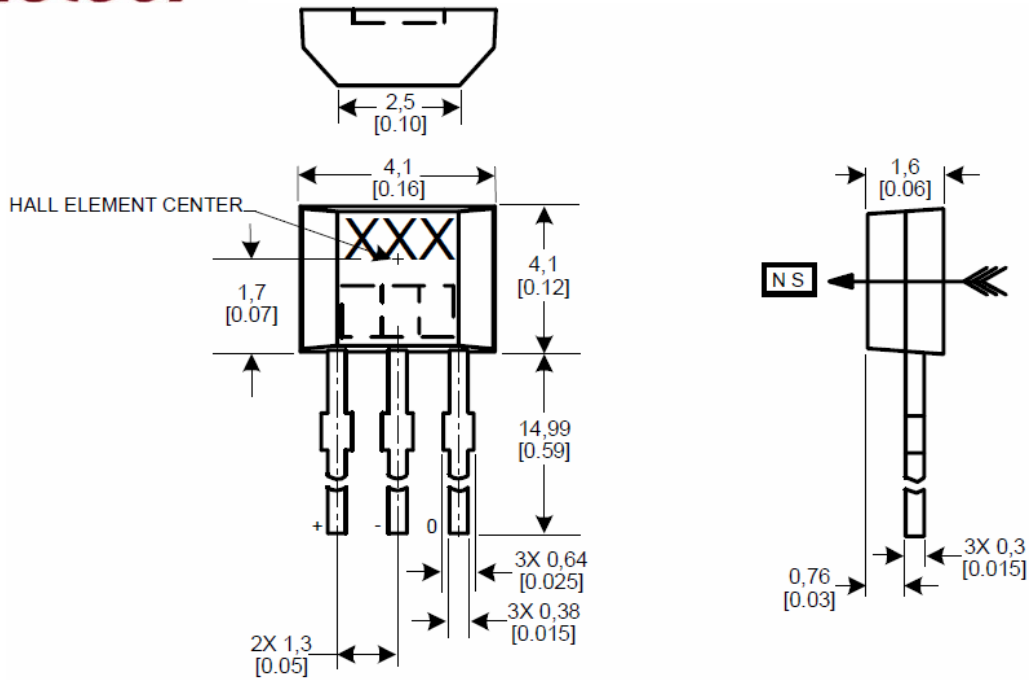


Figure 2. SS40 Hall Sensor Location

■ Ordering Information

PART NUMBER	GRADE	TEMPERATURE RANGE	PACKAGE	TAPE & REEL
SS40IPT	A: ±80G	-40°C to 125°C	SIP3	-T

■ Marking Information

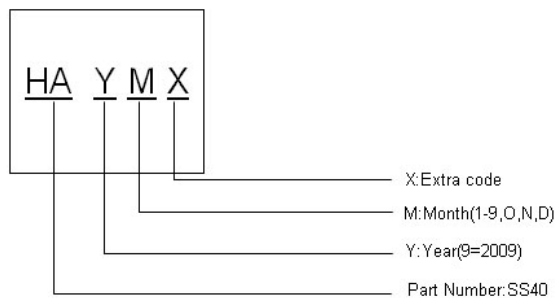

**Note:** PowerSilicon Corporation assumes no responsibility for any errors which may appear in this document. PowerSilicon Corporation reserves the right to change devices or specifications detailed herein at any time without notice.